


Gasoline Dispensing Hose (UL 300)

加油機用加油槍管

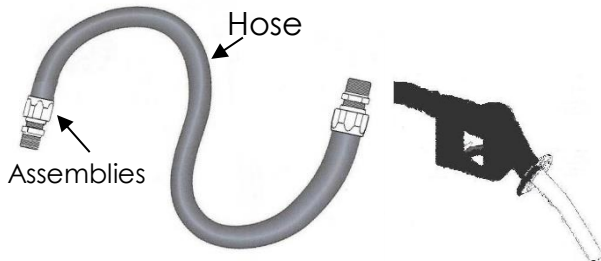

Application : Dispensing commercial gasoline and diesel fuel, from vehicle and marine service station pumps, Hoses and hose assemblies have received UL 330 approval.

Construction

Tube: Oil resistan synthetic rubber.

Cover: Oil, weather resistan synthetic rubber .

Reinforcement: Braided,high tensile hose wire or high tensile synthetic textile with static conductor wire

Temp.Range: temperature: -40 to + 60°C

用途

美國UL 330認證, 適用於車輛及船舶用加油機之各部聯接配管及加油槍專用管

構造

內管層: 耐燃料油之合成橡膠配方

外管層: 耐油,耐候性佳之特殊橡膠配方

補強層: 纖維或鋼絲編織

具導電特性

適用溫度: -40 to +60°C

產品編號 Part no.	I.D. 內徑		braid 編織	O.D. 外徑		W.P. 最高使用壓力		Length 長度 M 公尺
	inch	mm		inch	mm	psi	kgf/cm ²	
GP 0502	5/8	15.9	2 textiles	1.04	26.0	250	18	*
GP 0601	3/4	19.1	1 steel wire	1.10	27.8	250	18	*

UL330,Gasoline hose and hose assemblies for dispensing flammable liquids.

File no. MH45689 for " Flammable liquid hose assembles"

File no. MH45608 for "Gasoline hose"

*Packaging: Packaged 30±5 meters/ per reel ,maximum 2 pieces,minimum length 6 meters

The length of hose assembly is available upon request of customers max. 18f (5.4m)


協機工業提供橡膠管及兩端接頭夾合組件

NOTE: Only coupled assemblies by SC Kingflex Corp. receive UL approval, assemblers who make coupled hose assemblies are responsible for UL approval of their assemblies.

Eco Gasoline Dispensing Hose (UL330)

vapor recovery type 油氣回收型

加油機用(油氣回收型)加油槍管

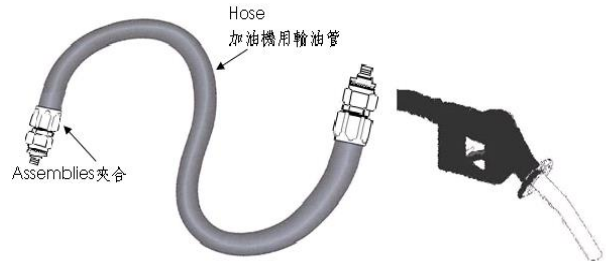

Application : Dispensing commercial gasoline and diesel fuel, from vehicle and marine service station pumps, Hoses and hose assemblies have received UL 330 approval.

Construction

Tube: Oil resistant synthetic rubber.

Cover: Oil, weather resistant synthetic rubber .

Reinforcement: Braided, high tensile hose wire or high tensile synthetic textile with static conductor wire

Temp. Range: temperature: -40 to + 60°C

用途

美國UL 330認證, 適用於車輛及船舶用加油機之各部聯接配管及加油槍專用管

構造

內管層: 耐燃料油之合成橡膠配方

外管層: 耐油, 耐候性佳之特殊橡膠配方

補強層: 纖維或鋼絲編織

具導電特性

適用溫度: -40 to +60°C

產品編號 Part no.	I.D. 內徑		braid 編織	O.D. 外徑		W.P. 最高使用壓力		Length 長度 M 公尺
	inch	mm		inch	mm	psi	kgf/cm ²	
GPR 0601	3/4	19.1	1 steel wire	1.10	27.8	250	18	*
GPR 1001	1	25.4	1 steel wire	1.40	35.6	250	18	*

UL330, Gasoline hose and hose assemblies for dispensing **vapor recovery** flammable liquids.

File no. MH45689 for "Flammable liquid hose assemblies"

File no. MH45608 for "Gasoline hose"

*Packaging: Packaged 30±5 meters/ per reel , maximum 2 pieces, minimum length 6 meters

The length of hose assembly is available upon request of customers max. 18f (5.4m)

協機工業提供橡膠管及兩端接頭夾合組件

NOTE: Only coupled assemblies by SC Kingflex Corp. receive UL approval, assemblers who make coupled hose assemblies are responsible for UL approval of their assemblies.